OPTIC 50 ELECTRIC FIREPLACE





High-End Affordability



SPECIFICATIONS

FLAME EFFECT Powered by Electricity

POWER SUPPLY 15 Amp, 120 Volt Circuit

WEIGHT 98 lbs.

 VIEWABLE OPENING
 43 5/8"W x 12"H

 FRAME
 50"W x 18 3/8"H

HEAT OUTPUT 1,500W (5,115 BTU/hr)

VENTING N/A **REMOTE CONTROL** Yes

CERTIFICATION CSA 22.2 NO.46, UL 2021

PRODUCT OPTIONS & ACCESSORIES

FIREPLACE FEATURES

- Designed and developed by European Home
- Realistic Flame Effects
- Flame Height and Speed Adjustment
- **Preset Flame Options**
- Remote Control
- **Built-in Heater**
- **UL** Listed
- Savings of 24% to 60%

ALL E SERIES ELECTRIC FIREPLACES SHIP AS A 3-SIDED MODEL WITH FIRE MEDIA THAT CAN EASILY TRANSFORM IT INTO A CORNER STYLE OR SINGLE-SIDED UNIT.

FIREPLACE MODEL

PRODUCT	ITEM CODE	
OPTIC 50	SH-FP-OPT-50	





WOODLAND (STANDARD)

CARRARA PEBBLES






FALLEN BIRCH


SEASHORE

PRODUCT		ITEM CODE		
	WOODLAND (STANDARD)	SH-FM-LOG-OPT-50		
	CARRARA PEBBLES	SH-FM-WHTP-Signal-40		
	FALLEN BIRCH	SH-FM-FB-Optic-50		
	SEASHORE	SH-FM-WHTP-Optic-50		


CUT SHEET




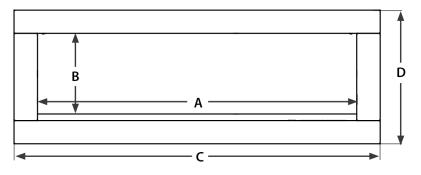



TOP VIEW





	Α	В	С	D	E	F	G
INCH	43 5%"	12"	50"	18 ¾"	47 %16"	8 1/16"	17 %"
[MILLIMETER]	[1108]	[305]	[1270]	[467]	[1208]	[205]	[448]

	Weight
POUNDS	98
[KILOGRAMS]	[44.5]

Description	Description See-Though Electric Appliance	
Туре	Electric Appliance	
Voltage	120V AC	
Watts	MAX 1500W	
Amps	Dedicated 15 Amp Grounded Circuit	

This appliance has been tested in accordance with the UL/CSA Standards for fixed and location dedicated electric room appliances in the United States and Canada, If you need assistance during installation, please contact your local dealer.



RFA files are available by clicking **HERE** or